

# Monteringsanvisning - Assembly instruction

Tygklädd bordsskärm

Textile covered screen



AB Edsbyverken, Box 300, SE-828 25 Edsbyn  
Tel/Phone +46 (0)271-27500, Fax +46 (0)271-27501  
[www.edsbyn.com](http://www.edsbyn.com)


Date:

2014-10-06

Nr:

00530137-F


Till bordsskiva/for table top



20 mm, min 22 mm tjock skiva kan användas.


20 mm, min 22 mm thick top can be used.

Till bordsskärm/for table screen





16 mm till Light bordsskärm  
25 mm till övriga

16 mm for Light table screen  
25 mm for other table screens

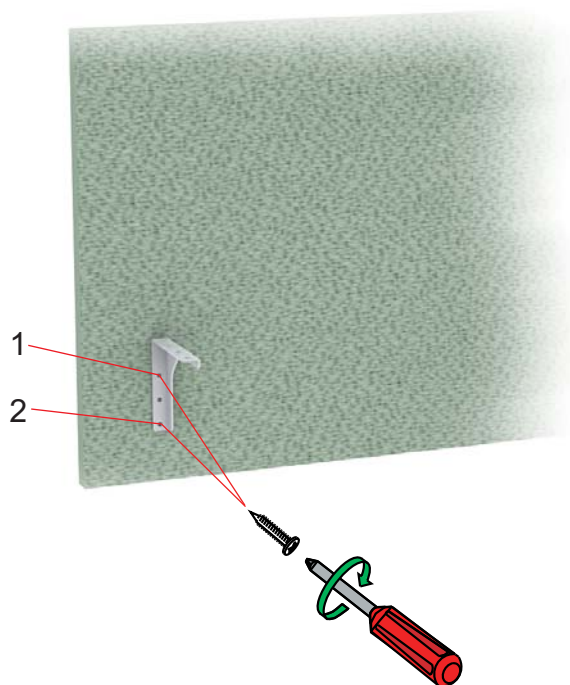

Mät in önskad skärmhöjd ovan bordsskivan.  
Fäst konsollerna i skärmen med 25 mm långa skruven.  
Använd vinkelhake vid montering, viktigt att konsoller monteras rätt i 90 grader.  
Skruva fast skruvarna i turordning enligt skiss.


Measure the desired height of the shade above the table.  
Assemble the brackets on the shade with the 25 mm screw.  
Use the set square in the assembly, important to assemble the consoles right at 90 degrees.  
Tighten screws in sequence according to the pictures.

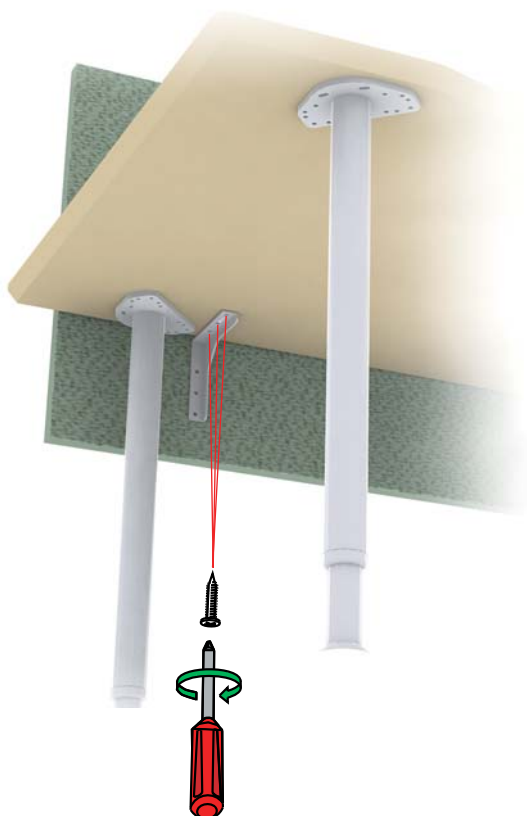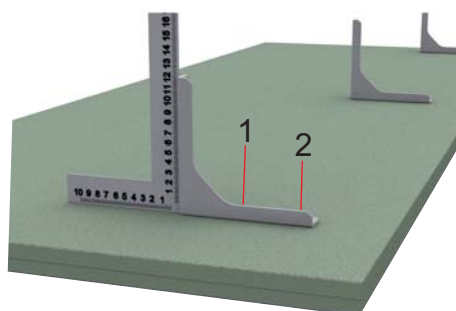

Fäst skärmen på önskad plats under bordet med 20 mm långa skruven.

Assemble the shade on a suitable place underneath the tabletop with the 20 mm screw.

## Skruv för tillbehörsskena/screw for accessory rail



16 mm till Light bordsskärm

25 mm till övriga


16 mm for Light table screen

25 mm for other table screens



Tillbehörsskenan monteras med försiktighet.  
För hårt dragna skruvar äventyrar hållfastheten.  
16 mm skruv till Light bordsskärm.  
25 mm skruv till övriga bordsskärmar.

Mount the accessory rail with caution.  
Too hard coated screws compromising strength.  
16 mm screw for Light table screen.  
25 mm screw for other table screens.

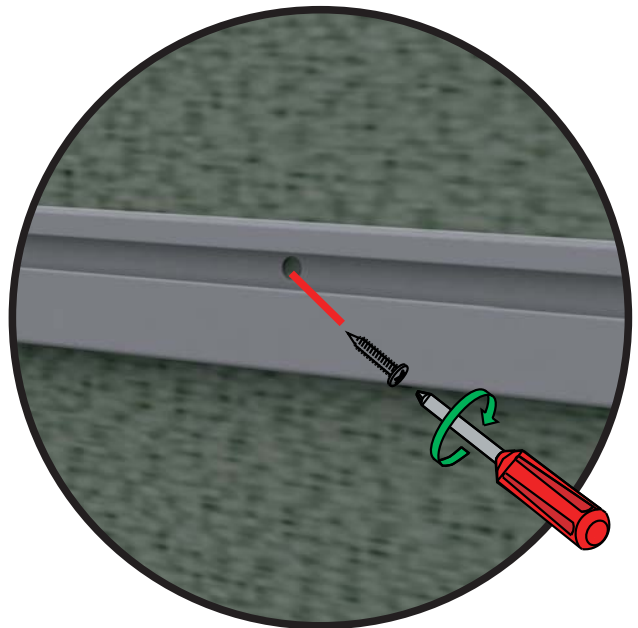

Max belastning vid  
montering av  
tillbehörsskenan är 8 kg.  
Ta hänsyn till  
hävstångseffekten.

Maximum load is 8 kg  
when using the  
accessory rail.  
Pay attention to the  
lever effect.

